


WIRE, ELECTRIC, RADIATION CROSSLINKED EXTRUDED, MODIFIED
 ETFE INSULATED, SILVER PLATED COPPER
 FOR WRAPPED SOLDERLESS CONNECTIONS

The complete requirements for procuring the wire described herein shall consist of this document.

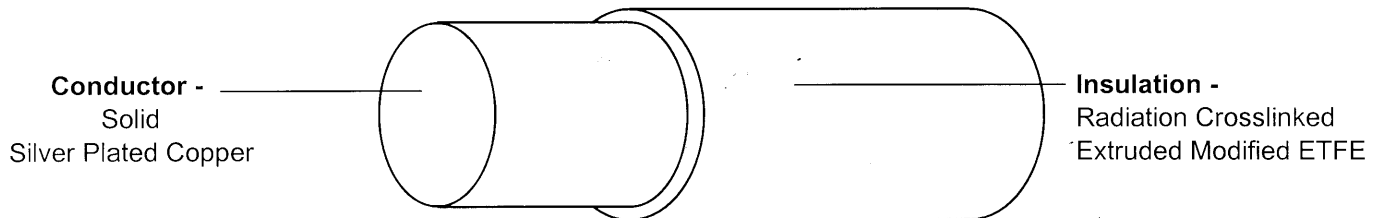

Part Number	Conductor			FINISHED WIRE			
	Wire Size (AWG)	Outside Diameter (mm) Nom.	Resistance @ 20°C (ohms/ km)		Diameter (mm)		Weight (kg/ km) Nom.
			Max.	Min.	Nominal	Max.	
55A9002-30-*	30	0.25	387	0.46	0.50	0.53	0.73
55A9002-26-*	26	0.40	152	0.64	0.67	0.71	1.63
55A9002-24-*	24	0.52	92.8	0.74	0.78	0.81	2.38

COLOUR CODE: The '**' in the part number shall be replaced by a standard colour code designator in accordance with Mil Std 681.

PERFORMANCE REQUIREMENTS: To be tested to and meet the requirements of the issue in effect of Raychem specification WSD 1244.