

# 207W213 to 256


Two-part feedthrough




## Applications

Use for strain relief and abrasion protection when cables pass through equipment boxes or panels.

### As supplied (a)



### After unrestricted recovery (b)

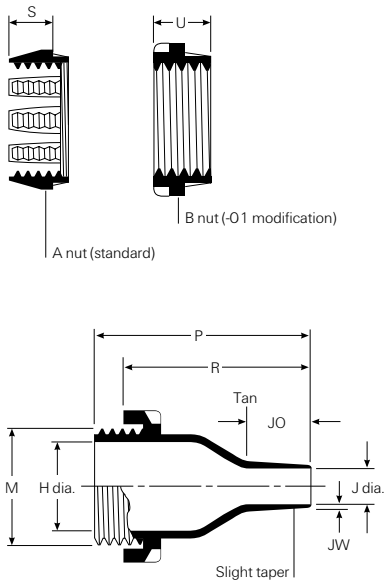

Available in:

Americas

Europe

Asia Pacific

**Fax-on-demand**

US only (800) 260-9099

Outside US (650) 257-2301

**Fax ID**

3300

**Description**

SCD

Visit our website at [www.tycoelectronics.com](http://www.tycoelectronics.com)**Materials available**

Material*	Material description	Precoating no.	Adhesive part no.**
-3	Semirigid polyolefin	/42 or /86	S-1017 or S-1048
-4	Flexible polyolefin	/42 or /86	S-1017 or S-1048
-25	Fluid-resistant elastomer	/42 or /86 or /225	S-1017 or S-1048 or S-1125
-100	Polyolefin, Zerohal	/180	S-1030

\*For more information, please see the appropriate material page in this section.

\*\*For more information, please see Section 5 of this catalog.

**Product dimensions (mm/in)**

Part number	H Ref. b	J Min. -3, -4, -12, -25 a		Min. -100 a	Max. b	JO Max. b	M Thread b	P ±10% b
		207W213	11.9 (.47)					
207W223	20.1 (.79)	18.0 (.71)	16.5 (.65)	7.1 (.28)	19.3 (.76)	30.0 (1.18)	71.9 (2.83)	
207W234	30.1 (1.22)	27.9 (1.10)	26.5 (1.04)	11.9 (.47)	26.9 (1.06)	41.9 (1.65)	87.1 (3.43)	
207W245	45.0 (1.77)	41.9 (1.65)	40.5 (1.59)	18.0 (.71)	32.0 (1.26)	55.9 (2.20)	102.1 (4.02)	
207W256	68.1 (2.68)	64.0 (2.52)	64.5 (2.54)	30.0 (1.18)	39.1 (1.54)	80.0 (3.15)	121.9 (4.80)	
	R ±10% b	S ±10% b	U ±10% b	JW ±20% b	Hole Dia. ±.51 (.02)			
207W213	49.0 (1.93)	13.0 (.51)	9.9 (.39)	1.3 (.05)	23.9 (.94)			
207W223	58.9 (2.32)	16.0 (.63)	9.9 (.39)	1.8 (.07)	34.0 (1.34)			
207W234	73.9 (2.91)	18.0 (.71)	9.9 (.39)	2.03 (.08)	47.0 (1.85)			
207W245	88.9 (3.50)	18.0 (.71)	9.9 (.39)	3.05 (.12)	60.5 (2.38)			
207W256	109.0 (4.29)	18.0 (.71)	9.9 (.39)	3.05 (.12)	85.1 (3.35)			

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 mm (.06") max.